
NEXT GENERATION REFRIGERANT

R32 is the next generation refrigerant that offers no harm to the ozone layer and boasts nearly 70% lower Global Warming Potential rate than R410A*.

Due to its superior qualities R32 offers amazing energy efficiency benefits. It has a potential refrigerating effect 1.5 times that of R410A meaning it needs less energy to achieve the desired temperature and requires less refrigerant volume to operate.**

*Note: Sourced from AREMA (www.arema.com.au) *Note: Sourced from HVAC&R Nation, an AIRAH publication, Issue Nov13 (www.airah.org.au)

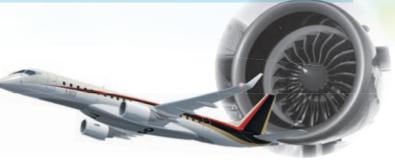

AIRCRAFT TECHNOLOGY FOR LONG REACH AND SILENT AIRFLOW

POSITIONING OF

You can set the left-right air flow directions

side wall by remote controller operation.

INSTALLATION


Airflow system designed with aircraft technology. CFD (computational fluid dynamics), used in blade shape design of jet engines, has been applied to develop the ideal air channel system. The jet technology enables powerful airflow delivering uniform gentle breeze to every corner of the room, increasing your comfort. In addition, the same technology ensures smooth air flow and makes it possible to lower operation noises by minimizing the interaction between wind flows and fan.



Heating and cooling operations are possible at an outdoor temperature as low as -15°C and as high as +46°C. Our new advanced technology has expanded the heating and cooling operation range. This permits installation of the units considering a heating and cooling operation under extreme temperature conditions.

LONG REACH AIR FLOW

Powerful 18mair flow, from 7.1kW in cooling conditions.

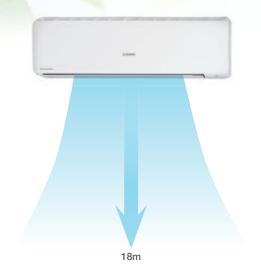

POWERFUL LONG REACH AIR FLOW

ABN 92 133 980 275 NSW & Head Office 9C Commercial Road, K Victoria 2/15 Howleys Road, Not 5/26 Flinders Parade, No Brisbane 12/31 Fleming Street, Ai Townsville Unit 3A 2 Mulgul Road, Western Australia

www.mhiaa.co.nz

www.mhiaa.com.au

Australia:

New Zealand: G.S.T. 105-673-620	Phone: 0800 138
Auckland	698A Great South Road,

MRE SPARE PARTS www.mrespareparts.com.au Tel: +61 (0) 2 9600 7444 Fax: +61 (0) 2 9600 8044



Our factories are ISO9001 and ISO14001 certified.

Because of our policy of continuous improvement, we reserve the right to make changes in all specifications without notice. E&OE.





WIRED WALL MOUNT CONTROL UNIT*

Our RC-EX3 wall controller is so easy to use, you can control your climate with the touch of a button. With control options for energy management, comfort, convenience and service. Everything you need is here. * Note: This feature is optional

SUPERIOR TECHNOLOGY THAT **OUTLASTS AND OUTPERFORMS**

BRONTE®

Residential Air Conditioners



7.1kW & 8.0kW



A MITEURISHI

Next generation R32 Refrigerant



Tara Dennis

Favoured by Interior Designer and Television Presenter Tara Dennis.





Phone: 1300 138 007	Fax: 1800 644 329
9C Commercial Road, Kingsgrove NSW 2208 2/15 Howleys Road, Notting Hill VIC 3168	PO Box 318 Kingsgrove NSW 1480 PO Box 4195 Burwood Fast VIC 3151
5/26 Flinders Parade, North Lakes QLD 4509	FO BOX 4195 BUI WOOD EAST VIC 5151
12/31 Fleming Street, Aitkenvale QLD 4812	PO Box 1386 Aitkenvale QLD 4814
Unit 3A 2 Mulgul Road, Malaga WA 6090	PO Box 2089 Malaga WA 6944
Phone: 0800 138 007	Fax: 09 5799 665

PO Box 112310, Penrose 1642 Penrose 1061



Wi-Fi Control

IntesisHome®



Control Your Mitsubishi Heavy Industries Air-Conditioner From Anywhere With Our Wi-Fi Control System

Turn the AC on before arriving home. Change the program if the user is arriving late. Know the current room temperature of your home. Check if the unit is still on once out of the building and turn it off. Program the AC with a calendar scheduler in an easy and intuitive way. And many more...

Can be used with Smartphone*, Apple Watch, Tablet and Web Easier than ever, always within reach, always under control



*Note: available for iPhone and other devices with Android OS installed.

Note: This feature is optional



BRONTE®

Residential Air Conditioners

FUNCTIONS & FEATURES

MODEL

SRK24YRA-W SRK63ZRA-W

SRK71ZRA-W SRK80ZRA-W SRK95ZRA-W

SERIES

SRK-ZRA-W

SRK-YRA-W (Cool Only)

Reverse Cycle	Capacity		6.3kW	7.1kW	8.0kW	9.5kW				
Indoor			SRK63ZRA-W	SRK71ZRA-W	SRK80ZRA-W	SRK95ZRA-W				
Outdoor			SRC63ZRA-W	SRC71ZRA-W	SRC95ZRA-W					
Power supply			1 Phase 220~240V 50Hz							
0	Cooling T1	1.1.47	6.3 (1.2~7.4)	7.1 (2.3~8.3)	8.0 (2.3~9.5)	9.5 (2.5~10.8)				
Capacity	Heating H1	kW	7.1 (0.8 ~9.2)	8.0 (2.0~10.9)	9.0 (2.1~11.2)	10.3 (3.2 ~11.9)				
1	Cooling T1		1.58 (0.2~2.5)	1.84 (0.48~2.4)	2.22 (0.48~3.1)	2.56				
Input	Heating H1	kW	1.60 (0.16~2.8)	2.02 (0.4~3.4)	2.40 (0.40~3.40)	2.64				
Example 1	Cooling T1	01.0	***	***	***	***				
Energy label	Heating H1	Stars	****	***	***	***				
EER	Cooling T1		3.99	3.86	3.60	3.71				
COP	Heating H1		4.44	3.96	3.75	3.9				
Sound power level (JIS C9612)	Cooling (Outdoor)		64	65	68	69				
	Heating (Outdoor)	dB(A)	66	63	66	70				
Sound pressure level (JIS C9612)	Cooling (Indoor)		44-39-35-25	43-40-36-24	46-43-38-25	48-45-40-26				
	Heating (Indoor)	dB(A)	44-38-34-28	46-39-35-28	47-41-36-29	48-42-37-29				
	Cooling (Outdoor)		45	43	44	50				
Silent mode sound pressure level	Heating (Outdoor)	dB(A)	45	41	42	49				
A:	Cooling (Indoor)	1/2	342-301-262-173	342-310-270-174	383-345-300-182	408-355-293-173				
Airflow	Heating (Indoor)	l/s	392-317-275-218	425-330-288-222	450-363-315-234	458-386-318-226				
	Indoor		339x1197x262							
External dimensions (HXWXD)	Outdoor	mm	640x800(+71)x290	750x880	845x970(+89)x370					
Net state	Indoor		15.5							
Net weight	Outdoor	kg	45		58					
	Liquid line		Ø6.35	Ø6	0.35	Ø9.52				
Refrigerant piping	Gas line	mm	Ø12.70	Ø15.88						
	Connection method		Flare connection							
Defrivement D00	Quantity	kg	1.25 1.6 2							
Refrigerant R32	Pre charged to pipe length	m	15							
Clean filter			Alle	rgen Clear & Photocatalyt	ic Washable Deodorizing	Filter				

Energy	Saving			Ai	r Flow & H	ligh Pow	er				Clean C	peration	& Filter					Comfor	t & Conve	enience					Oth	iers	
Fuzzy Automode	Economy Mode	JET Air Technology	HI POWER" Operation	3D Auto	Auto Flap Mode	Memory Flap	Up/Down Flap Swing	Right/Left Louver Swing	Positioning of Installation	Allergen Clear System	Self Clean Operation	Allergen Clear Filter	Photocatalytic Washable Deodorizing Filter	Removable Panel	Dry Operation	Silent Operation	Night Setback	Comfort Start-up	Weekly Timer	Sleep Timer	On Timer	Off Timer	Child Lock	Microcomputer-Operated Defrosting	Self-Diagnostic Function	Back-up Switch	Auto Restart Function
Fizy	Econom	II	HIPOWE	3D Auto	Auto Flap	Memory			Positioning of installation	Allergen System	Self Clean Operation	Allergen Filter	SUN Filter			Silent	Night Setback		On Weekly Timer Off	Sleep **)*	On Timer	OFF Timer	Child Lock	MC ₀°°⊙	Self Diagnostic	Back-up Switch	Auto Restart
\checkmark	√	√	√	√	√	\checkmark	√	√	√		\checkmark	\checkmark	\checkmark	\checkmark	\checkmark		√	V	V	√	\checkmark	\checkmark	\checkmark	\checkmark	V	√	\checkmark
√	√	√	√	√	√	\checkmark	√	√	√	√	\checkmark	V	\checkmark	\checkmark	√	√	√	√	√	√	√	\checkmark	√	√	V	√	√
√	√	√	√	√	\checkmark	\checkmark	√	√	√	√	\checkmark	V	\checkmark	\checkmark	\checkmark	√	√	√	√	√	V	\checkmark	√	√	V	√	\checkmark
√	√	√	√	√	√	\checkmark	√	√	√	√	\checkmark	√	√	√	√	√	√	√	√	√	√	√	√	√	V	√	√
√	√	√	√	√	√	√	√	√	√	√	\checkmark	√	\checkmark	√	√	V	√	√	√	√	√	√	√	√	√	√	√





R32

Cool Only	Capacity (Cool)		7.1kW				
Indoor			SRK24YRA-W				
Outdoor			SRC24YRA-W				
Power supply			1 Phase 220~240V 50Hz				
Capacity	Cooling T1	kW	7.1 (2.3~8.3)				
Input	Cooling T1	kW	1.84 (0.48~2.4)				
Energy label	Cooling T1	Stars	***				
EER	Cooling T1		3.86				
Sound power level (JIS C9612)	Cooling (Outdoor)	dB(A)	65				
Sound pressure level (JIS C9612)	Cooling (Indoor)	dB(A)	43-40-36-24				
Silent mode sound pressure level	Cooling (Outdoor)	dB(A)	43				
Airflow	Cooling (Indoor)	l/s	342-310-270-174				
	Indoor		339x1197x262				
External dimensions (HXWXD)	Outdoor	mm	750x880(+88)x340				
Naturalaht	Indoor		15.5				
Net weight	Outdoor	kg	58				
	Liquid line		Ø6.35				
Refrigerant piping	Gas line	mm	Ø15.88				
	Connection method		Flare connection				
Defrigement D20	Quantity	kg	1.6				
Refrigerant R32	Pre charged to pipe length	m	15				
Clean filter			Allergen Clear & Photocatalytic Washable Deodorizing Filt				

Refrigerant Pipe Length		SRK63-71-80-95ZRA-W	SRK24YRA-W
Maximum pipe length	m	30	30
Maximum height difference	m	20	20



